

COFFEE & BEVERAGE FAUCETS

EQUIPMENT & REPLACEMENT PARTS

Tomlinson Industries is a leading manufacturer of faucets and fittings for dispensing coffee, tea and water. No-Drip® products are the choice of manufacturers of beverage and liquid containers around the world. If you have a specific dispensing application in mind, give us a call. We would be happy to work with you.



S Tomlinson 1000437

The S Tomlinson is the industry standard beverage dispensing faucet. Chromed brass body and metal threaded nylon bonnet. Fits 1/2" NPS union nut or wing nut shanks.

Flow Rates	Pressure	Max. Temp.	Thread Size
4.45 oz/sec 2.09 gal/min 7.92 l/min	14 PSI, .93 BAR	212°F, 100°C	1-1/32"-14 UNS

SPB Tomlinson 1000636

Same as Model S, but with black polypropylene body for use on tea dispensers and liquid containers. Use with 16CNY or 16TNY series shanks.

Flow Rates	Pressure	Max. Temp.	Thread Size
4.53 oz/sec 2.13 gal/min 8.06 l/min	14 PSI, .93 BAR	170°F, 77°C	1-1/32"-14 UNS

SPBH Tomlinson 1000669

Black polypropylene body, nylon bonnet and "Nudger" handle. Includes two washers and aluminum jam nut. Optional chromed brass bonnet, plastic jam nut and upright handles available.

Flow Rates	Pressure	Max. Temp.	Thread Size
3.31 oz/sec 1.56 gal/min 5.89 l/min	14 PSI, .93 BAR	170°F, 77°C	3/8"-18 NPSM

HPSC-BR 1000387


Chromed brass body, shank and bonnet, nylon handle and stem, two washers and nickel plated brass jam nut. Used to dispense hot water at gravity pressure.

Flow Rates	Pressure	Max. Temp.	Thread Size
1.97 oz/sec .93 gal/min 3.50 l/min	15 PSI, 1.00 BAR	212°F, 100°C	1/2"-20 UNF



PPSHP-8 1/4" Flare 1000341

High pressure faucet for dispensing water. Chrome plated brass body with flare end for 1/4" tubing. Complete with safety handle, aerator and bonnet safety clip. Handle color options: black and blue.

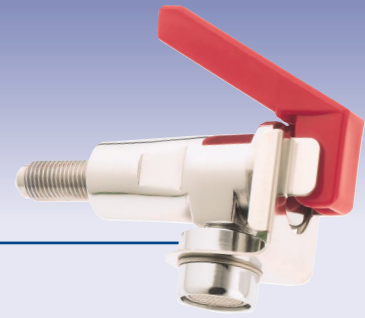

Flow Rates	Pressure	Max. Temp.	Thread Size
5.28 oz/sec 2.48 gal/min 11.25 l/min	120 PSI, 8.00 BAR	212°F, 100°C	7/16"-20 UNF

Basic 3/4" Gauge Shield Assemblies

3/4" O.D. gauge shield assemblies. Basic gauge shield assembly includes 76-2 shield base, 77-4 shield cap, anodized aluminum gauge shield, glass and washers. Additional lengths available. Contact factory with your specifications.



Description	Model #	Description	Model #
A78-4"	1014197	A78-9"	1000868
A78-7"	1000849	A78-10"	1000875
A78-8"	1000854	A78-10-3/4"	1000882

Beverage Center Cleaning Kit 1013038

This cleaning kit contains all the necessary supplies to properly clean and maintain any beverage center. Kit includes a 5/8" gauge glass brush, airport brush, urn brush, coffee decanter brush, double sided brush, filter separator and an assortment of urn cleaners.



Replacement Parts

Gauge Shield Washer Kit 1000955

Consists of upper and lower washers for gauge shield assemblies. Includes 4 cap and 2 base washers.

Stem and Pin Set 1000949

Replacement 4S Stem/8S3 Pin Set for old style upper assemblies on S and SC faucets.

Complete Upper Assembly 1001013

New style black plastic upper assembly for S Series faucets.

1001026 Same as above, but in orange for decaf faucets.
1001028 Same as above, but in red for hot water faucets.

A2-5PSC/173H-1 Upper Assembly 1401140

Replacement upper assembly for HPS hot water gravity faucet. Consists of chromed brass bonnet with lock-open handle.

3S10 Seat Cup

Replacement FDA-grade silicone rubber seat cup for S and SP Series faucets.

1015877 Shipped 25 per bag.

1015878 Shipped 50 per bag.

7SJTL Spring 1015879

Replacement stainless steel spring for S and SP Series faucets.

Shipped 25 per bag.



No-Drip® Division
13700 Broadway Avenue • Cleveland, OH 44125-1992
Phone: 216/587-3400 • FAX: 216/587-6192
www.tomlinsonind.com • World Class, Worldwide

©Tomlinson Industries 2002 Printed In U.S.A. 4/02

